




SPEED BLAST TRADING L.L.C.
OIL FIELD & INDUSTRIAL SUPPLIERS

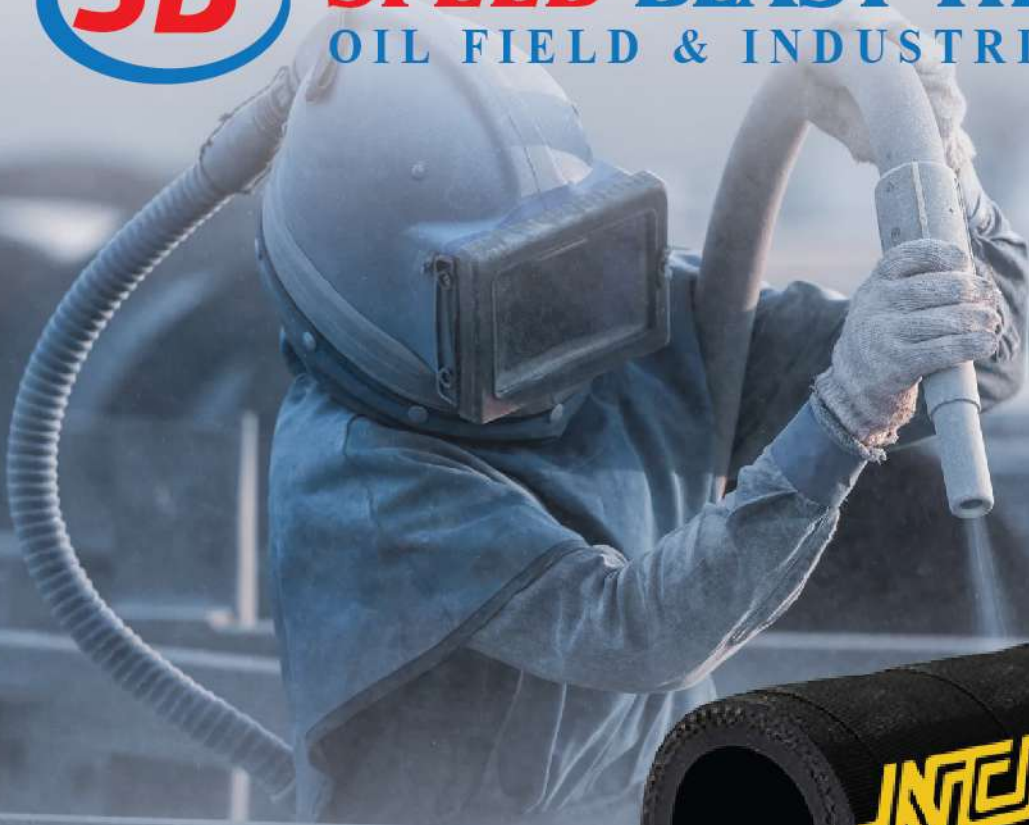

INTER
The Hose Specialist.

OIL AND INDUSTRIAL HOSE

COMPANY PROFILE

Founded in 2009, **Speed blast trading LLC** oil field & Industrial suppliers. Sandblast hose, Air hose, Cement hose, Cement suction & Discharge hose. Integrity, competitive pricing, excellent customer service are the cornerstones of our business.

Speed Blast was established in Dubai to respond quickly to booming and ever-changing demands of construction, oil & gas industry and also to provide solution for surface treatment & finishing technology in this market.

We hold our own precision investment in blasting, cooling, painting, equipment & accessories. So we can have a good control for manufacturing good quality standard. With our professional technology ability & years of manufacturing experience, we are able to constructure to meet customer special application.

Speed Blast is providing solution for surface preparation equipment. During & after paints for surface preparation industries and market leader & global source for abrasive, blasting, painting, quality control and safety equipment & supplies since 2009.

Honor, quality and satisfaction is well - established as our motto. Based on that, with honesty practice, efficiency and innovation attitude, we sincerely expect partnership from all over the world.



Industrial Hose

Cement Hose
Sandblast Hose

Air & Water

Air Hose
Water Hose

Welding & Cutting

Oxygen & Acetylene Hose

Petroleum

Oil Hose

Special Application

Multi-Purpose Hose

Symbol Guide



Sand/Cement



Delivery



Minimum Bending Radius (x times of ID)



Minimum Working Temperature (°C)



Maximum Working Temperature (°C)



Safety Factor (x times of WP)

SANDBLAST HOSE



- Applications** : For conveying abrasive sandblasting materials in cleaning and blasting metal, casting and concrete surfaces.
- Tube** : Excellent abrasion resistant synthetic rubber
*Abrasion resistance: DIN 53516 $\leq 60\text{mm}^3$
- Reinforcement** : High tensile synthetic fabric
- Cover** : High abrasion and weather resistant synthetic rubber
- Marketing** : **JNER SB175 SANDBLAST HOSE - HEAVY DUTY - BP 530PSI - WP 175PSI**



Nominal ID		ID	OD	WP		BP		Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	
1/2	13	13.0	29.0	12	175	36	530	BA-52001
3/4	19	19.0	33.0	12	175	36	530	BA-52002
1	25	25.4	39.0	12	175	36	530	BA-52003
1.1/4	32	32.0	48.0	12	175	36	530	BA-52004
1.1/2	38	38.0	54.0	12	175	36	530	BA-52005
2	51	50.8	69.0	12	175	36	530	BA-52006
2.1/2	63	63.5	82.0	12	175	36	530	BA-52007
3	76	76.2	96.0	12	175	36	530	BA-52008
4	102	101.6	122.0	12	175	36	530	BA-52009

For sizes other than listed above, please contact us

CEMENT SUCTION & DISCHARGE HOSE



- Applications** : For suction and discharge of cement and abrasive slurry materials. Abrasion resistant refer to DIN 53516
- Tube** : Excellent abrasion resistant synthetic rubber
- Reinforcement** : High tensile synthetic fabric with steel helical embedded wire
- Cover** : High abrasion and weather resistant synthetic
- Marketing** : **JNER CSD150 CEMENT SUCTION & DISCHARGE HOSE - BP 450PSI - WP 150PSI**



Nominal ID		ID	OD	WP		BP		Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	
3	76	76.2	98.0	10	150	30	450	BC-41001
4	102	101.6	125.8	10	150	30	450	BC-41002
5	127	127.0	152.0	10	150	30	450	BC-41003
6	152	152.4	180.0	10	150	30	450	BC-41004

For sizes other than listed above, please contact us

COMPRESSED AIR HOSE



Applications : For use with air compressors in mines, quarries, service stations, construction sites, shipyards, factories and other general services.

Tube : Synthetic rubber

Reinforcement : High tensile synthetic textile filament yarn

Cover : Ozone and weather resistant synthetic rubber

Marketing : **INTER AIR HOSE ID" WP XX PSI BP XX PSI**



Air 30 Series



Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
1/4	6	6.3	12.5	10	150	30	450	100	AZNA06BSJ06
5/16	8	8.0	15.0	10	150	30	450	100	AZNA08BSJ06
3/8	9	9.5	16.5	10	150	30	450	100	AZNA09BSJ06
1/2	12	12.7	20.0	10	150	30	450	100	AZNA12BSJ06
5/8	16	16.0	24.0	10	150	30	450	50	AZNA16BSE06
3/4	19	19.0	28.0	10	150	30	450	50	AZNA19BSE06
1	25	25.4	36.0	10	150	30	450	50	AZNA25BSE06

Air 45 Series



Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
1/4	6	6.3	13.0	15	225	45	660	100	AZNA06BSJ07
5/16	8	8.0	15.5	15	225	45	660	100	AZNA08BSJ07
3/8	9	9.5	17.0	15	225	45	660	100	AZNA09BSJ07
1/2	12	12.7	20.5	15	225	45	660	100	AZNA12BSJ07
5/8	16	16.0	25.0	15	225	45	660	50	AZNA16BSE07
3/4	19	19.0	29.0	15	225	45	660	50	AZNA19BSE07
1	25	25.4	37.0	15	225	45	660	50	AZNA25BSE07

Also available in 30, 50m lengths, please contact us

Air 60 Series



Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
1/4	6	6.3	13.5	20	300	60	900	100	AZNA06BSJ08
5/16	8	8.0	16.0	20	300	60	900	100	AZNA08BSJ08
3/8	9	9.5	17.5	20	300	60	900	100	AZNA09BSJ08
1/2	12	12.7	21.0	20	300	60	900	100	AZNA12BSJ08
5/8	16	16.0	26.0	20	300	60	900	50	AZNA16BSE08
3/4	19	19.0	30.0	20	300	60	900	50	AZNA19BSE08
1	25	25.4	38.0	20	300	60	900	50	AZNA25BSE08

Also available in 30, 50m lengths, please contact us

COMPRESSED AIR HOSE - HEAVY DUTY



Applications : For heavy-duty use with air compressors in quarries, service stations, construction sites, shipyards, factories and other general services.

Tube : Synthetic rubber

Reinforcement : High tensile synthetic textile filament yarn

Cover : Ozone and weather resistant synthetic rubber



ISO 2398 : 2016
Type 1 Class A



Marking : **INTER** AIR HOSE ISO 2398:2016 / 1A / L-T / XX mm / 1.0 MPa / 10 bar

Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
1/4	6	6.3	12.5	10	150	30	450	100	AZNA06BSJ04
5/16	8	8.0	15.0	10	150	30	450	100	AZNA08BSJ04
3/8	9	9.5	16.5	10	150	30	450	100	AZNA09BSJ04
1/2	12	12.7	20.0	10	150	30	450	100	AZNA12BSJ04
5/8	16	16.0	24.0	10	150	30	450	50	AZNA16BSE04
3/4	19	19.0	28.0	10	150	30	450	50	AZNA19BSE04
1	25	25.4	36.0	10	150	30	450	50	AZNA25BSE04

ISO 2398 : 2016
Type 2 Class A



Marking : **INTER** AIR HOSE ISO 2398:2016 / 2A / L-T / XX mm / 1.6 MPa / WP 16 bar

Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
1/4	6	6.3	13.0	16	240	64	960	100	AZNA06BSJ05
5/16	8	8.0	15.5	16	240	64	960	100	AZNA08BSJ05
3/8	9	9.5	17.0	16	240	64	960	100	AZNA09BSJ05
1/2	12	12.7	20.5	16	240	64	960	100	AZNA12BSJ05
5/8	16	16.0	25.0	16	240	64	960	50	AZNA16BSE05
3/4	19	19.0	29.0	16	240	64	960	50	AZNA19BSE05
1	25	25.4	37.0	16	240	64	960	50	AZNA25BSE05

Also available in 30, 50m lengths, please contact us



Tube : Oil mist resistant synthetic rubber

Marketing : **INTER AD300** AIR HOSE - HEAVY DUTY - BP 900PSI - WP 300PSI



Nominal ID		ID	OD	WP		BP		Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	
1.1/4	32	32.0	44.0	20	300	60	900	BR-52001
1.1/2	38	38.0	51.0	20	300	60	900	BR-52002
2	51	50.8	65.0	20	300	60	900	BR-52003
2.1/2	63	63.5	80.0	20	300	60	900	BR-52004
3	76	76.2	92.0	20	300	60	900	BR-52005
4	102	101.6	118.0	20	300	60	900	BR-52006

Goods of Description: 3/8" BREATHING HOSE

Commodity
3/8 BREATHING HOSE

Specification
6Φ

Quantity
45

Judgement
Acceptance

TEST ITEM		UNIT	CRITERIA	RESULT
Appearance		-	No Defects	No Defected
Component		-	No Defects	No Defected
Dimension	Inner Diameter	mm	6 ±0.2	6.1
	Thickness	mm	3.0 over	3.1
Hydraulic Test		-	No Defects	No Defected
Burst Test		Kg/cm ²	60 Over	87
Peel Test		mm	25 Below	5
Tensile Strength (Outside rubber)		Kgf/cm ²	140 Over	146.9
Elongation (Outside rubber)		%	200 Over	250
Tensile Strength Change (Outside rubber)		%	25 Below	3.0
Elongation Change (Outside rubber)		%	30 Below	7.3
Tensile Strength (Inside rubber)		Kgf/cm ²	130 Over	140.6
Elongation (Inside rubber)		%	300 Over	360
Tensile Strength Change (Inside rubber)		%	25 Below	1.6
Elongation Change (Inside Rubber)		%	30 Below	5.7



Goods of Description: CEJIN 1/4" TWIN HOSE (6.5mm * 13mm * 100m)

Commodity
1/4" TWIN HOSE

Specification
6Φ

Quantity
45

Judgement
Acceptance

TEST ITEM		UNIT	CRITERIA	RESULT
Appearance		-	No Defects	No Defected
Component		-	No Defects	No Defected
Dimension	Inner Diameter	mm	6 ±0.2	6.1
	Thickness	mm	3.0 over	3.1
Hydraulic Test		-	No Defects	No Defected
Burst Test		Kg/cm ²	60 Over	87
Peel Test		mm	25 Below	5
Tensile Strength (Outside rubber)		Kgf/cm ²	140 Over	146.9
Elongation (Outside rubber)		%	200 Over	250
Tensile Strength Change (Outside rubber)		%	25 Below	3.0
Elongation Change (Outside rubber)		%	30 Below	7.3
Tensile Strength (Inside rubber)		Kgf/cm ²	130 Over	140.6
Elongation (Inside rubber)		%	300 Over	360
Tensile Strength Change (Inside rubber)		%	25 Below	1.6
Elongation Change (Inside Rubber)		%	30 Below	5.7



Goods of Description: Neoflex Spray Paint Hose

Dimensions:

INCH	SIZE		PRESSURE (Kg/cm ²)	
	I.D(mm)	O.D(mm)	W. P	B. P
1/4"	6.3	12.4	430	1,250
3/8"	9.5	15.8	350	1,050
1/2"	12.17	18.5	300	750





DUBAI : P.O. Box: 283256, Dubai, United Arab Emirates

Tel : +971 4 340 7255, Fax: +971 4 340 7254

ABU DHABI : Mussafah 26, Abu Dhabi, United Arab Emirates

Tel : +971 2 555 7085, Fax: +971 4 340 7254

Email : info@speedblast.me, Website : www.speedblast.me